


NEBS GR-63 Test Systems

Systems
&
Solutions

Engineered
vibration testing
solutions for
improved
product quality.

Team Corporation
11591 Watertank Road
Burlington, WA 98233
Tel: (360) 757-8601
Fax: (360) 757-4401
sales@teamcorporation.com
www.teamcorporation.com

Team Corporation UK
Team Corporation UK Ltd
11 Old Ladies Court
High Street
Battle
East Sussex
TN33 0AH
United Kingdom
Tel: +44 (0) 1424 777004
Fax: +44 (0) 1424 777005
sales@teamcorporation.co.uk
service@teamcorporation.co.uk
www.teamcorporation.co.uk

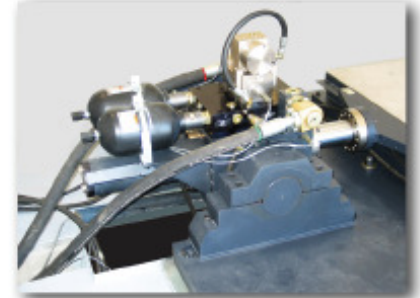

Features:

- Quick, easy change-over from horizontal to vertical modes with trunnion mounted shaker
- Performs 100% of NEBS GR-63 CORE vibration specifications

Customers:

Currently 15 systems in the field including...

- NTS Fullerton
- Garwood Laboratories
- Curtis Strauss Laboratory
- TRW
- ITS/TestMark Labs
- Dayton T. Brown

Applications:

- Telephone switch gear
- Internet routers, switches, etc.
- Optical switches
- Uninterrupted power supplies (UPS)

Sample Specifications

Shaker System

- 0-500 Hz performance
- 10.5 inch Peak-Peak Displacement
- 40 inches per second Peak Velocity
- Accurate VERTEQ II Waveform replication
- Trunnion mounted

SMP-48 Vertical Vibration Table

- 0-500 Hz performance
- Welded Magnesium Vibration Table
- 48 x 48 in. working surface
- Customer specified grid of threaded steel inserts

810.5/7.0 Hydrostatic Bearing Actuator

- 14,000 lbf Dynamic Force
- 10.5 inch Dynamic Stroke
- 12.0 in. Total Stroke
- Internal LVDT Position Transducer
- Horizontal and Vertical Mounting

HPS-265 Hydraulic Power Supply

- Complete hydraulic system with required interlocks and sensors for remote operation
- 68 gpm @ 3,000 psi
(Facility requirements: 480VAC, 3 Phase, 60 Hz., 225 Amperes electrical service, 35 gpm @ 80°F water flow)

483.48-16 T-Film Slip Table System

- 0-500 Hz performance
- Magnesium Horizontal Slip Table
- 16 T-Film™ bearings
- 300,000 ft-lbs. Pitch and Roll capacity
- 48 x 48 in. working surface
- Customer specified grid of threaded steel inserts

Control System

- 2240 Voice Coil Valve Driver
- 1510-D Sequential Pump Controller
- PC-based Shaker Control System

