

Engineered  
vibration testing  
solutions for  
improved  
product quality.

**Team Corporation**  
11591 Watertank Road  
Burlington, WA 98233  
Tel: (360) 757-8601  
Fax: (360) 757-4401  
sales@teamcorporation.com  
www.teamcorporation.com

**Team Corporation UK**  
**Team Corporation UK Ltd**  
11 Old Ladies Court  
High Street  
Battle  
East Sussex  
TN33 0AH  
United Kingdom  
Tel: +44 (0) 1424 777004  
Fax: +44 (0) 1424 777005  
sales@teamcorporation.co.uk  
service@teamcorporation.co.uk  
www.teamcorporation.co.uk

# Package Vibration Test System

*Team* servo hydraulic vibration test systems offer versatile and cost effective testing solutions for the transportation and packaging industry. To meet the transportation and packaging tests identified in the ASTM, ISTA and IEC specifications *Team* can offer either the LCS-48 Package Test System or custom designed solutions.

The LCS-48 is a compact, self-contained unit with a 1.2m (48") square vibration table. The system is exceptionally quiet and does not require any additional utilities such as water for cooling or external hydraulic supplies. The integral hydraulic supply is an efficient, air-cooled, variable volume hydraulic pump that allows the electric motor to work in exact proportion to the system needs, thereby reducing electrical consumption.



## Features:

- Totally Self Contained Unit
- Air Cooled- Hydraulic Pump/Motor, no water required
- Quiet - 72 dB at 6 feet (2 metres)
- Compact - 48" x 72" (1.2m x 1.8m) footprint
- Large Table Working Area 48" x 48" (1.2m x 1.2m)
- High Performance - 2" (50mm) stroke and up to 200 Hz frequency range
- Sine and Random Testing
- ASTM, ISTA and IEC Capability

## Electronic Applications:

- TV's Videos, Microwaves, fridges, freezers etc.
- Computers, Printers, Monitors, & Peripherals


## Commercial Applications:

- Farm Produce-Fruit, Vegetables and Flowers
- Pharmaceuticals, Perfumes and Cosmetics

# LCS-48 Specifications

## LCS-48

Dynamic Force	2,200 lbf (9786 N)
Maximum Stroke	2.00 inches (50mm)
Dynamic Moment Capacity	10,000 in-lbs (178.5 kg/mm)
System Velocity	16 in/sec (0.4 m/s)
Table Size	48" x 48" (1.2m x 1.2m)
Maximum Load Rating	800 lbs (362 kg)
Reaction Mass	Integral - 5000 lbs (2268 kg)
Maximum Frequency	200 Hz Sine 300 Hz Random
Physical Size	48" x 72" 36" (1.2 x 1.8 x 0.9 m)
Shipping Weight	6500 lbs (2948 kg)

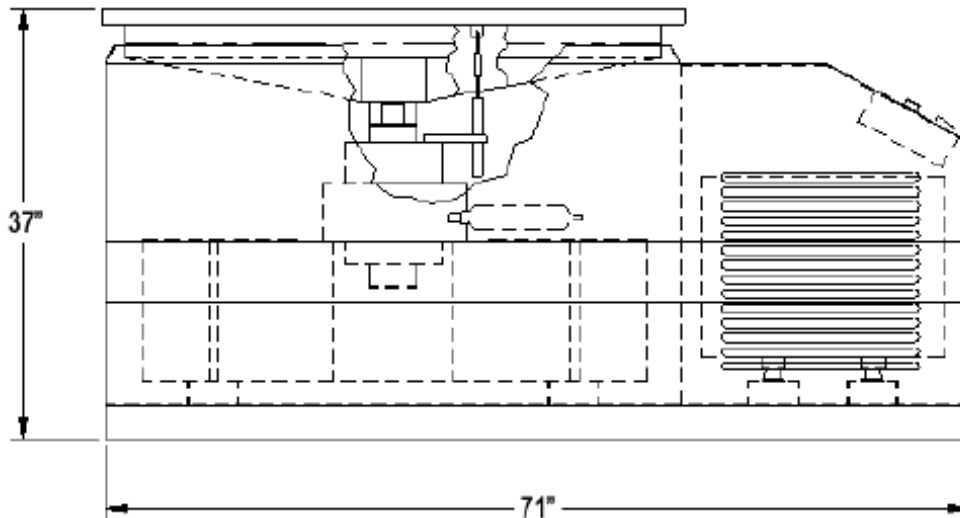

LCS 48 Elevation